

DETECTION AND MAPPING OF THE LAND USE/LAND COVER (LULC) CHANGES IN THE “JORDAN VALLEY” USING LANDSAT IMAGERIES

M. Abu Kubi

Applied Research Institute – Jerusalem (ARIJ)
P.O. Box 860, Caritas St., Bethlehem – Palestine

SUMMARY: Information about change is necessary for updating Land Use/ Land Cover LULC maps and the management of natural resources (XiaoMei Y, & RongQing L.Q.Y., 1999). The paper aims to map the changes in the LULC using different classification methods and to quantify the land use/ land cover change that took place in the Jordan Valley. The paper promotes the classification of LULC based on remote sensing information (obtained mainly through the utilization of Thematic Mapper TM and Enhance Thematic Mapper ETM scenes) to generate data products that are both appropriate to, and immediately usable within different scientific applications. The advancement of remote sensing technology in the developing countries such as Palestine encouraged the use of remotely sensed data to monitor the land use changes in an effective and more frequent manner. Three classification approaches were deployed and the appropriateness of the classifications to derive accurate land use maps for the pilot area using Landsat scenes were evaluated. The results showed that the use of spectral mixture analysis classification approach enhanced the classification accuracy and the ability to categorise the LULC on the pixel level.

Key words: Land use/land cover, Classification, Supervised, Unsupervised, Spectral Mixture Analysis

INTRODUCTION AND LITERATURE REVIEW

Information about change is necessary for updating land cover maps and the management of natural resources (XiaoMei Y, & RongQing L.Q.Y., 1999). The information may be obtained by visiting sites on the ground and/ or extracting it from remotely sensed data. Many researches have been undertaken to develop methods of obtaining change information. Change detected from different temporal images usually reflects natural and human activity impacts. As we know, the Jordan River because its semi desert climatic conditions the area is susceptible to desertification thus monitoring the land use change using multi temporal images will provide an indication on the rate and the magnitude of change.

Many studies have demonstrated the effectiveness of using remotely sensed data as a powerful tool to detect land use change for critical environmental areas, vegetation dynamics and urban expansion. In some instances land use / land cover change may result in environmental, social, and economic impacts of greater damage than benefit to the area (Mohsen A., 1999). Thus, data on land use change are of value to planners in monitoring the consequences of land use change on the region. Such data are of value to resource management and planning agencies in assessing current land use patterns and in modelling and predicting future developments.

Previous research on land use land cover mapping and change was carried out by the Applied Research Institute to map the West Bank using remotely sensed digital data. The institute used both visual interpretation by screen digitising the main landscape features (e.g. urban fabrics, road network etc.) and numerical interpretation by applying different image processing algorithms. Part of their work in this research was published in the Atlas of Palestine 2001. Another study carried out by Ben Gurion University of the Negev, employed NOAA/AVHRR images for monitoring the spatial and temporal changes of the vegetation cover in Israel including the West Bank. The study demonstrated the

potential of NOAA images to distinguish different vegetation cover types and temporal variability of vegetation cover.

Shoshany and Kutiel (1994) investigated the advantages of remote sensing techniques in relation to field surveys in providing a regional description of vegetation cover. The results of their research were used to produce four vegetation cover maps that provided new information on spatial and temporal distributions of vegetation in this area and allowed regional quantitative assessment of the vegetation cover. In 1997, the Applied Research Institute of Jerusalem in association with the Israeli and Jordanian counterparts started to model the effect of water content on the vegetation dynamics in the Jordan Valley. In addition, the University of Yale through their irrigation project named SWAP has taken the Jordan basin as the study area. This project attempted to analyse multi-temporal TM scenes to investigate trends in irrigated and rain-fed agriculture, urban and suburban sprawl, and the hydrologic and vegetative responses of desert and steppe systems to acute temporal variations in climate (Yale 1998).

It is evident in all previous research that the Jordan Valley is a sensitive indicator of environmental conditions that exhibit rapid temporal and spatial changes in this area. Thus, frequent monitoring of vegetation is important to understand the environmental processes in this area.

AIM

The objective of the study is to use traditional and advanced image processing algorithms to generate change information from multi-temporal data sets. The various methods are then evaluated for efficacy and suitability.

Objectives

The paper addresses two specific objectives listed as follows:

1. To investigate the ability of different classification methods on mapping and detecting LULC changes using remote sensing data, this involves two traditional classification techniques (supervised, unsupervised) and spectral mixture analysis.
2. To quantify the extent of land use changes on the vegetation cover using the multi-temporal datasets.

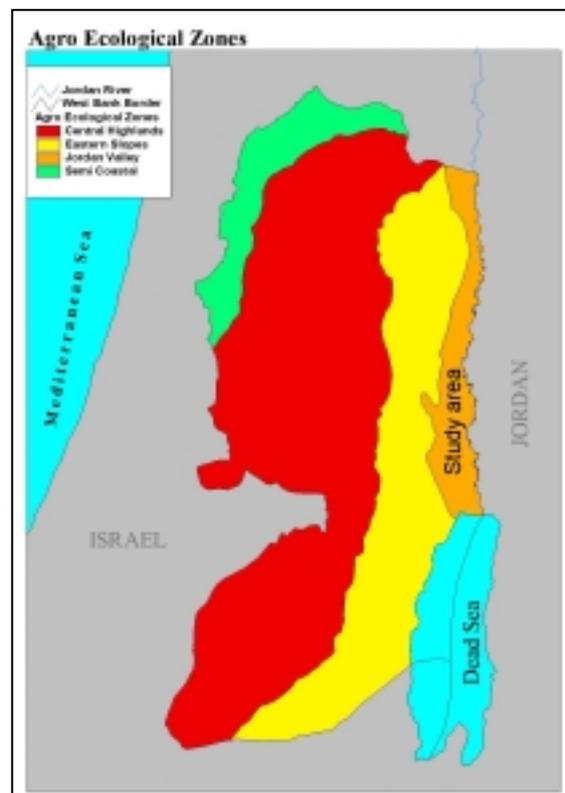


Fig. 1. Agro Ecological Zones of the West Bank, the study area has the same geographical extent of the Jordan Valley ecological zone.

Rationale

The scope of this research is to provide a comprehensive review of different techniques and algorithms that are used to derive useful information from remotely sensed digital images (obtained mainly through the Thematic Mapper and Enhance Thematic Mapper) to generate data products that are both appropriate to, and immediately usable within different scientific applications. Monitoring the changes in the Jordan Valley will reserve the rich natural resources and develop the agricultural potentiality. The Jordan valley has natural resources that can be utilized to increase the agriculture production and thus, has great importance to the development of viable Palestinian State.

The cost effectiveness of using remote sensing technology and the advancement in computing techniques to extract LULC information from digital images makes it more viable for developing countries such as Palestine and so gives more reasons for studying the Jordan Valley area. Further more, many remote sensing techniques are still experimental, however, sufficient understanding and expertise has been acquired to supplement accurate data collection with large-scale mapping. Thus, the research will offer good chance to investigate the appropriateness of available techniques to derive LULC in the Jordan valley.

The monitoring of land change using data from the Landsat Thematic Mapper is adequate for general extensive synoptic coverage of large areas. As a result this reduces the need for expensive and time-consuming ground surveys conducted for validation of data. In general, satellite imagery is able to provide more frequent data collection on a regular basis, unlike aerial photographs which although may provide more geometrically accurate maps is limited in respect to its extent of coverage and expensive, which in turn means it is undertaken less often.

Moreover, the fact that we don't have access to all parts of the West Bank to obtain ground truth points and restrictions on obtaining aerial photos at fairly frequent level due to security reasons, force us to use Satellite remotely sensed scenes as the most reliable source of data to map this region.

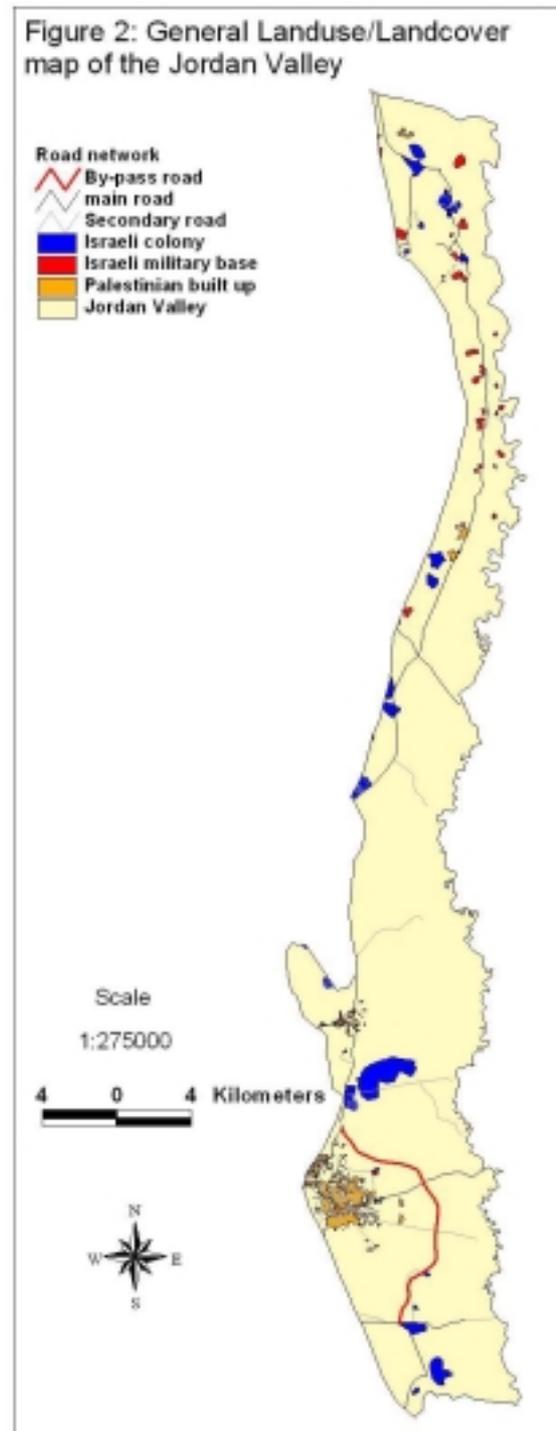


Fig. 2. General Land use/Land cover map of the Jordan Valley

BACKGROUND

Study area geographic location and physical characteristics

The Jordan Valley area, mainly due to its unique nature, is selected as study area. It is located between the eastern slopes strip and the Jordan River (*fig 1*). The study area geographic extent covers Al Auja and part of the Israeli agricultural colonies located to the north of Jericho city. While to the south the study area extends to the Dead Sea (*fig 2*). The principal sources of water for agriculture and domestic purposes are the Jordan River and the groundwater. The region is known for its high temperature with an average minimum temperature in January range from 7.4° C to 19.7° C and average maximum temperature in August range from 22.4° C to 37.6° C (ARIJ, 1997).

The study area is characterised by rich fertile soils such as alluvial and brown soils loessial serozems (ARIJ Report, 2001), which is combined with high temperature weather conditions, create prime agriculture land. The area grows a variety of crops (herbaceous vegetation subtropical and tropical fruits, such as citrus, banana, and dates as well as winter vegetables) and has multiple growing seasons producing two crop types per year in certain regions due to warm winter in the Jordan valley which provide optimum conditions to grow certain crops or fruits. Farmers in the Jordan Valley use the latest technology and agricultural methods such as green houses, different irrigation techniques and they diversify their crop cultivation every season depending on the market demand and the water supply.

The study area more recently was affected by severe water deficiency due to decrease in the annual rainfall over the West Bank. Consequently, the LULC pattern in this region has been affected. This further demonstrates the need for more research on this area.

PROJECT DATASET

This paper utilized two types of datasets. The first type was remotely sensed data as a major data for processing and thematic map production. The second type was the supplementary datasets mainly obtained from the GIS datasets available at the Applied Research Institute – Jeusalem (ARIJ) spatial database.

Remotely sensed data

Landsat TM & ETM digital data of March 1, 1985, and May 5 2001 were employed in this study. This data set was supplied by the Mediterranean Agronomic Institute of Chania MAICH. Criteria to the selection of the multi-temporal Landsat data set involved assessment of cloud cover percentage, time of acquisition, and sensor type so that LULC mapping and change detection scope was optimized.

In order to obtain the maximum information from Landsat imageries used for image processing for land use/land cover change study, the selection of optimum Landsat TM images were taken. One of the advantages of the Jordan Valley scenes is that the chance of having cloud is rare thus the Jordan Valley is always successfully imaged by TM and ETM sensors without cloud contamination.

Supplementary data

High-resolution aerial photographs of 1:20000 scale covering the study area captured on May 1995 was used mainly to verify the accuracy of the Landsat imageries classification. Other supplementary data was incorporated to improve the accuracy of the derived LULC were listed as follows:

1. General land use map showing the main landscape features such as Palestinian urban development, road networks and Israeli colonies (*fig. 2*).
2. Rainfall map covering the study area with 50mm isohyets.
3. Digital Terrain Model DTM extracted and clipped from Stereo Panchromatic scene with grid size of 10 meter.

4. Ground truth points randomly distributed in the Jordan valley area employed to rectify remotely sensed data and to pinpoint training site for the supervised classification. It was not easy to collect ground truth data, thus, the only and the ultimate solution were to deploy ground truth data collected from previous field surveys.

METHODOLOGY

Classification approaches

Classifications procedures were applied on each Landsat scene separately by using the different classification methods including (1) hard classification using supervised and unsupervised classification (Erdas Inc., (1999). (2) Spectral Mixture Analysis that often involves the use of ancillary information (*Chart 1*).

The first approach is unsupervised classification where the classification is based on the aggregation of the classes depending on the spectral reflectance. Then the spectral classes were identified by comparing the classified image to ground truth points or aerial photos, the next step is to combine and label the spectral clusters into information classes.

The second approach is the supervised classification where minimum distance to means, and maximum likelihood classifiers were run on the landsat scenes (TM & ETM). This approach is totally dependent on the spectral pattern recognition (Lillesand, 1994). The supervised classification technique is preferred, because the data of the study area is known and the prior knowledge about the nature of the study area was available. 14 training area were used for the supervised classification of each image. These training areas were delineated from a false colour composite image. These training sites represent agricultural areas, semi natural areas and water bodies. To avoid misclassification, these training areas must be as homogeneous as possible. Ancillary data such as aerial photos, ground truth points, and DTM were considered during the selection of training areas in order to obtain the greatest accuracy of the classification results.


Actual change can be obtained by a direct comparison between classification outcomes from one date with that from the other date. Temporal changes that have occurred between the two dates can be measured by performing change matrix (Howarth and Wickware, 1981 cited in Somporn S., 1995). However, in this study only direct comparison between the two scenes was performed to identify the temporal affect.

The third approach is the Spectral Mixture Analysis (SMA). This approach was adopted to perform an inventory of landscape objects that are significantly smaller than the size of the pixel in remotely sensed imagery. The adoption of this classification approach was deployed to test the appropriateness of this technique to derive accurate land use maps for the pilot area using Landsat images.

Accuracy assessment

Once the classification was done, further knowledge of the area was obtained through the use of previous data collected from the field. These data provided better detail as to what types of land use are likely to be present within the study area, especially in the location where heterogeneous canopy is distributed. High-resolution aerial photos were used as valuable source of data for the purpose of validating the classification accuracy. Hence, it was impossible to conduct field surveys due to the unstable political situation, where the Israeli Defense Force IDF imposing closure and siege around the Palestinian cities and denying the Palestinians the right to access most of the Occupied Palestinian Territories OPT.

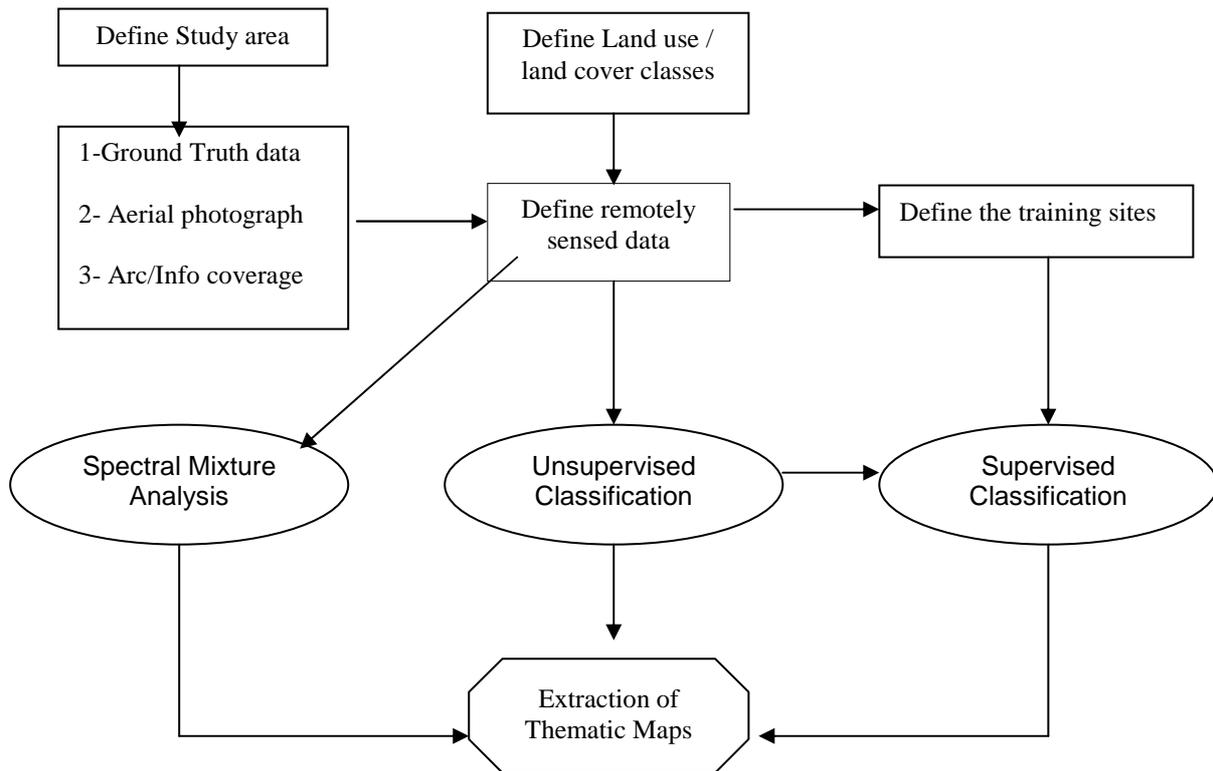Chart 1. The flow chart shows the major steps of the study



RESULTS AND DISCUSSION

To investigate the land use change in the Jordan valley intuitive analysis was implemented on the Landsat TM 1985 and Landsat ETM 2001 images. This involves the use of two classification techniques to derive LULC inventories for the two years in order to compare the changes on the spatial trends during sixteen years.

Supervised classification results

Supervised classification was used to derive general LULC of the pilot area (*figs. 3 and 4*). Before starting with the analysis using the above method unsupervised classification (isodata algorithm) was run in order to attain pure spectral signature that represent real LULC. The modified signatures obtained from the unsupervised classification were used to derive ten LULC classes. Also pure signature was collected using ground truth points obtained from the field. The first level of CORINE nomenclature was adopted to produce standardized classes. Thus the ten classes were aggregated to three classes to have compatible and universal spatial data that can be stored in databases for other scientific purposes. Visually, the output results were fairly good and represent the real classes in the field to about 70 to 75 percent. It was planned that another field survey should be conducted in order to increase the accuracy of the derived thematic maps. Unfortunately, due to limitation on time and movement, carrying out the field survey was impossible. *Table 1* portray the attributes and the areas derived from the processed Landsat TM scene 1985 for each land use class, while the attributes derived from Landsat ETM 2001 was given in *table 2*.

The classification of the Landsat TM 1985 scene, given in *table 1* shows that the Jordan valley is occupied by bare rocks and semi natural vegetation. *Chart 2* shows that only 13 percent of the valley is occupied by vegetation while the rest is semi natural vegetation (bare fields and grazing land). The classification of Landsat TM 2001 scenes shows that the vegetation progression was increased from 13 percent in 1985 to 27 percent in 2001(*chart 3*). However, this increase in the vegetation does not only represent the agricultural areas but also the natural vegetation. There was no mean to differentiate between the two types of vegetation due to spectral reflectance similarity. Of course, this implies that the annual rainfall for the year 2001 was higher than that on the year 1985. Thus, higher vegetation intensity and progression was depicted from the analysed Landsat ETM 2001 scene.

The results imply that the Jordan valley is very sensitive to the annual rainfall levels where the aridity index shows that during drought seasons the greenness level decline dramatically in the Jordan Valley. The interpretation of the produced thematic data shows that the increase in the vegetation cover can be attributed to the high rainfall levels in year 2001 and to the excessive utilization of the surface and groundwater resources by the Israeli agricultural colonies to cultivate vineyards, banana and citrus.

Table 1. The attribute data derived from the supervised classification of Landsat TM scene, captured on 1985

Land use / land cover	Histogram value	Area in hectare
Agricultural Areas	58,232	5,233
Semi Natural Areas	388,114	34,878
Water Bodies	91	8

Table 2. The attribute data derived from the supervised classification of Landsat ETM scene, captured 2001

Land use / land cover	Histogram value	Area in hectare
Agricultural Areas	119,680	10,765
Semi Natural Areas	324,164	29,159
Water Bodies	2,096	188

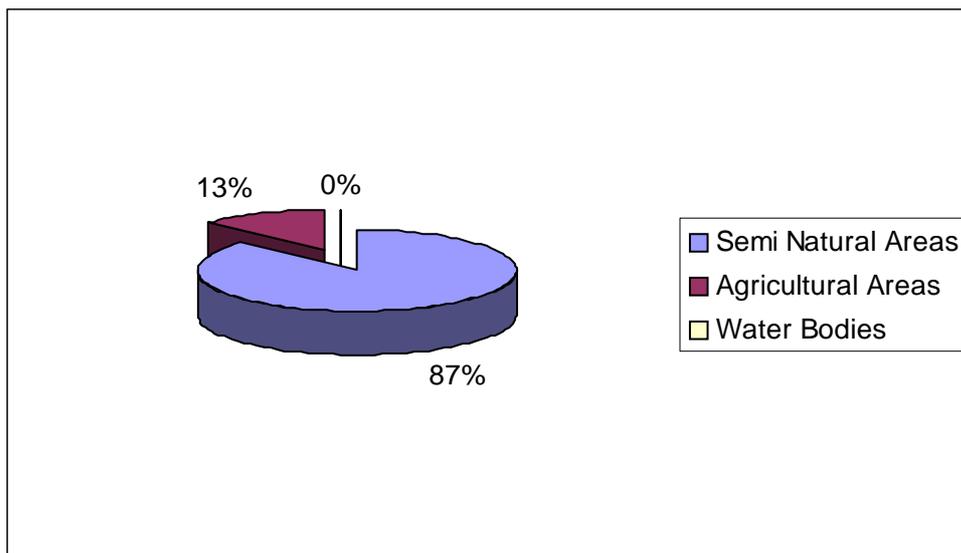


Chart 2. Land cover statistics derived using supervised classification of Landsat TM 1985 of the Jordan Valley

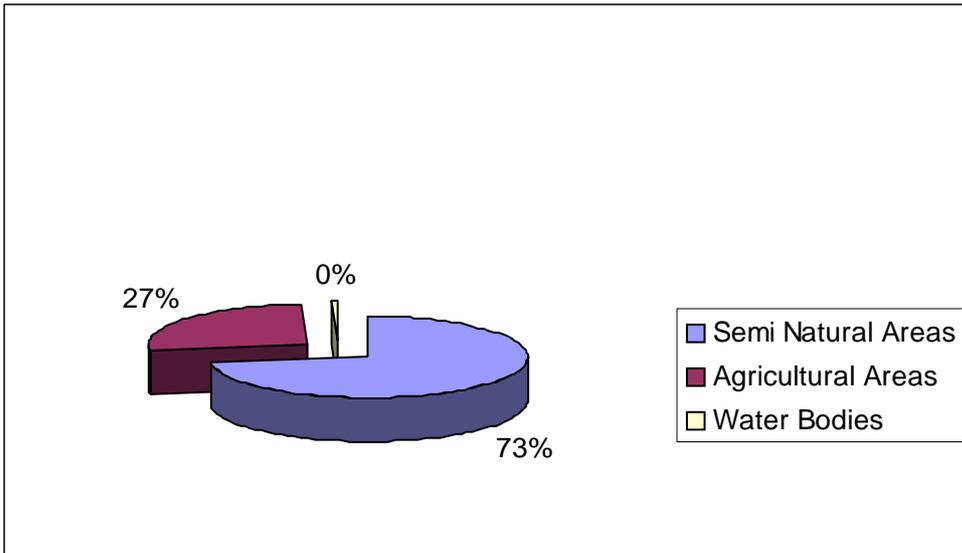


Chart 3: Land cover statistics derived using supervised classification of Landsat ETM 2001 of the Jordan Valley

The interpretation and the analysis of remotely sensed data (Landsat TM and ETM) were dependent on the multispectral characteristics of the scenes. However the large pixel size of Landsat TM (30 * 30 meter) make the classification is inevitably biased. Since, it is impossible in most of the cases to have landscape objects covering 100 percent the pixel area. This phenomenon is clearly found in the pilot area (Jericho ecological zone) where the land plots used for agriculture is smaller than the pixel size and share many other land use components such as urban development and bare rocks. In order to attain better results that represent accurately the real LULC, a new classification approach was applied, which is termed Spectral Mixture Analysis (SMA). It is worth mentioning that SMA classification is considered a new approach of remotely sensed data categorization on the pixel level that needs experienced technician and further results verification

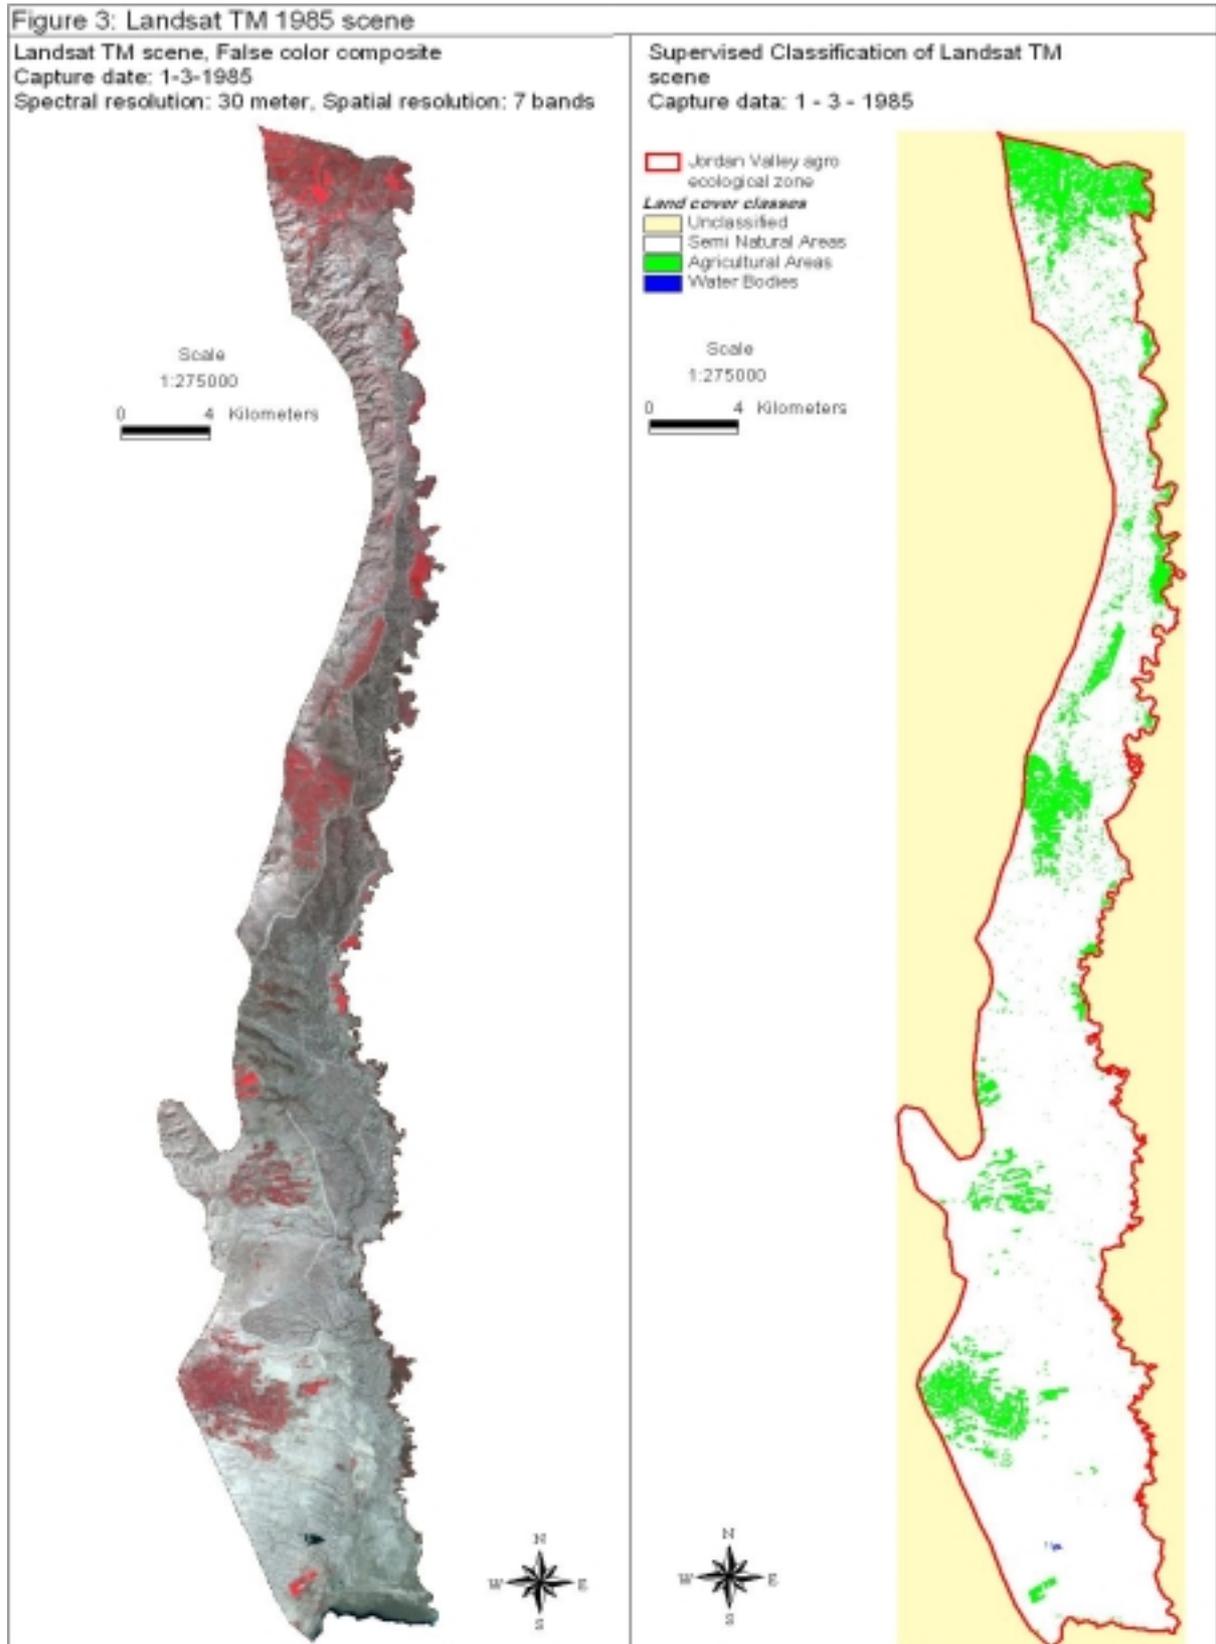


Fig. 3. Shows landsat TM scene on the left side and the derived thematic data of the supervised classification on the right side.

Figure 4: Landsat ETM 2001 scene

Landsat TM scene, False color composite
Capture date: 5 - 3 - 2001
Spectral resolution: 30 meter, Spatial resolution: 7 bands



Supervised Classification of Landsat TM scene
Capture data: 5 - 3 - 2001

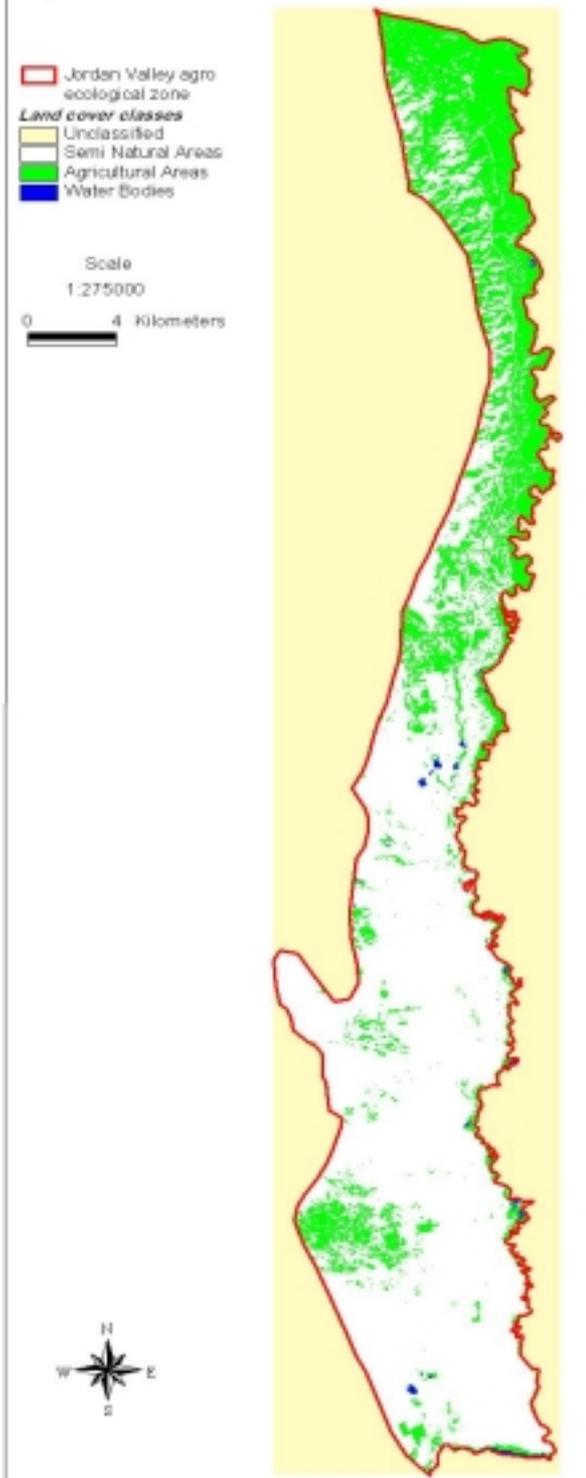


Fig. 4. Shows landsat ETM 2001 scene on the left side and the derived thematic data of the supervised classification on the right side.

Spectral mixture analysis

Many techniques deployed for the purpose of extracting thematic data showing the mixture of each pixel in the Landsat scenes. The preprocessing steps were implemented to prepare the data for further analysis to derive the thematic data. Data calibration was the starting step to compare the spectra of the scenes with the library spectra, then Minimum Noise Fraction MNF was run to segregate noise in the data, determine inherent data dimensionality, and reduce computational requirements for subsequent processing (Green et al., 1988, cited from ENVI tutorial). The third step was to run the Pixel Purity Index (PPI) function to find the most spectrally pure or “extreme” pixels in the multi spectral data (Boardman and Kurse, 1994, cited ENVI tutorials). Both the MNF and PPI operations effectively reduce the data volume to be analyzed interactively. Two dimensional plots such as scatter plot geometry were used as a visual tool to locate image spectral end members. Three-end member were successfully delineated, these are soil (bare fields), vegetation areas and water bodies. These end members spectrally have pure signature. The final step is to run the Linear Spectral Unmixing LSU, where mixed pixels can be analyzed using a mathematical model where the observed spectrum is the result of multiplication of the mixing library of pure end member spectra by the end member abundances. Fig. 5 shows the extracted thematic data using the Spectral mixture analysis technique for the two scenes under investigation. Statistical data about the proportion of each end member in each pixel were derived from the thematic data and given in table 3, the data was aggregated to ten classes to simplify data reading. Each class starts with zero fractional abundance to 100 percent called pure pixel value. It is obvious, that most of the thematic data derived from the analysis is a mixture of many land use features and pure pixels are extremely rare (Boardman 1994, cited ENVI tutorial). This implies that the classification using spectral mixture analysis approach provide viable tool of quantitative and qualitative analysis of LULC patterns in the Jordan Valley.

Table 3. Landsat TM captured on the 1 of March 1985









Pixel value		Vegetation		Bare Rock		Water	
Minimum	Maximum	Pixel No.	Vegetation Intensity	Pixel No.	Bare Rock intensity	Pixel No.	Water intensity
0	0	13500	No vegetation	1200	No rock	12700	No water
0	0.1	27700		588400		596800	
0.1	0.2	48200		5700		19200	
0.2	0.3	66900		12300		33500	
0.3	0.4	663900		20200		38200	
0.4	0.5	61000		28800		47700	
0.5	0.6	46200		53700		51200	
0.6	0.7	23800		79800		49200	
0.7	0.8	11800		88600		47600	
0.8	0.9	9400		80900		42500	
0.9	1	7100		50700		35300	
1	1	56800	Pure vegetation	26000	Pure rock	62400	Pure water

Figure 5: Linear Mixture Analysis

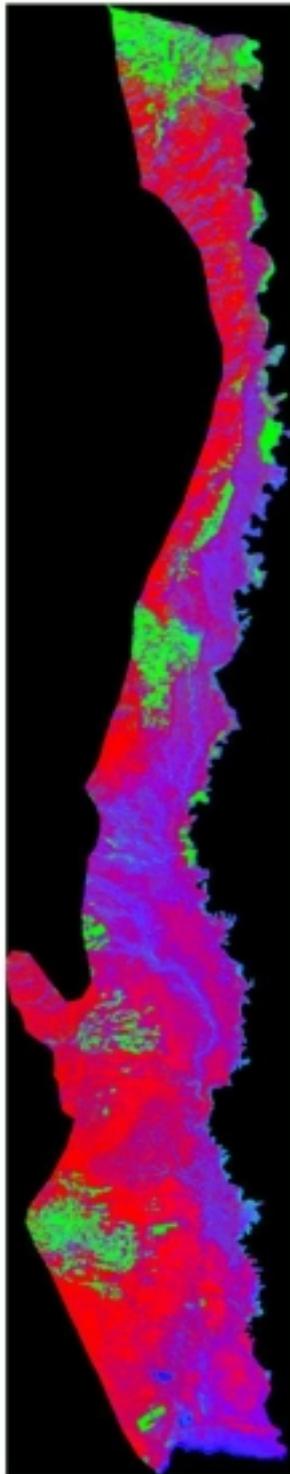Classification of Landsat TM 1985 using Linear mixture analysis technique



Classification of Landsat TM 2001 using Linear mixture analysis technique

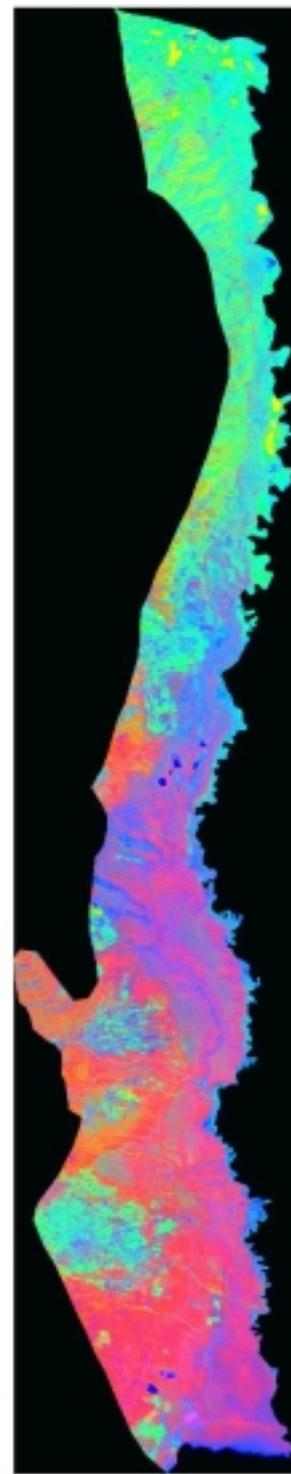


Fig. 5. Shows the extracted thematic data for landsat TM 1985 (left) and landsat ETM 2001 (right) scenes using the Spectral mixture analysis technique

CONCLUSION AND RECOMMENDATION

The results of the study disclose five major findings as followings:

1. Automatic classification using the hard classification approach proved to be a good indicator to estimate the magnitude and the type of LULC in the Jordan Valley.
2. The vegetation in the Jordan Valley seems to be very much controlled by the season, demonstrated as a high greenness peak and high expansion rates in May of every year.
3. One of the most important findings of this research is the significant increase in the vegetation cover during the last decade. On the other hand, the water quantities have been continuously decreasing in the aquifers as a result of decline in the annual rainfall. This should lead us to think seriously about other alternative of water sources to support the agriculture in the valley or change the irrigation methods. Failure to do so would expose the agriculture in the whole region to a potentially devastating situation in the near future due to this unbalanced water use.
4. The results show that the vegetation cover is changed dramatically during the sixteen year. This phenomenon could be attributed to two reasons: firstly, the Jordan valley is very sensitive to seasonal effects and secondly because farming practices have been changed between the sixteen-year period.
5. Spectral mixture analysis classification provides new prospective to acquire quantitative and qualitative information using remotely sensed data.

Finally, it is hoped that this study has provided the initial tools and background information about the automatic classification systems to produce quality thematic maps. It is expected that further work in similar studies would lead to greater understanding of image processing for LULC purposes. The value of digital processing has been proven to be very cost effective in such research and has been proven advantageous in previous studies that utilized Landsat data. This kind of data is increasingly suitable for use in developing countries such as Palestine, due to its consistency, reliability and availability. It may be concluded that the use of Landsat scenes for mapping LULC change in the Jordan valley area provided a satisfactory result if the appropriate techniques were used in data analysis. However, it is recommended to derive LULC on regular interval, so that the information can be updated through time.

Acknowledgments

I wish to acknowledge the Mediterranean Agronomic Institute of Chania MAICH for providing the Landsat data for this research project. Thanks are given to Dr. Gitas Ioannis for his useful supervision. Also I would like to thank the Applied Research Institute for the GIS data utilised in the research and for nominating me to participate in the training program at MAICH, Greece.

REFERENCES:

- Applied Research Institute (1997). *The Status of the Environment in the West Bank*. ARIJ: Jerusalem.
- ARIJ Report, (2001). *Overview of Geopolitical Situation in Palestinian Areas*. Jerusalem.
- Envi Inc., (1999). *ENVI 3.2 Tutorial*. Better Solutions Consulting LLC, Lafayette, Colorado. (Online). Available at: <http://www.envi-sw.com>.
- Erdas Inc., (1999). *Erdas Imagine Tour Guides*. United State of America.
- Lillesand, T.M., & Kifer, R.W., (1994). *Remote Sensing and Image Interpretation*. (Third Edition). United States of America: John Wiley & sons, Inc.

- Mohsen A., (1999). *Environmental land use Change detection and assessment using with multi-temporal satellite imagery*. Zanzan University.
- Research Systems Inc, 1997, *ENVI User's Guide*.
- Schmidt, H., and Gitelson, A., (1999). Temporal and spatial vegetation cover changes in Israeli transition zone, AVHRR-based assessment of rainfall impact. *International Journal of Remote Sensing*, 21(5), 997-1010.
- Senay, G.B., and Elliott, R.L., (1999). Combining AVHRR-NDVI and landuse data to describe temporal and spatial dynamics of vegetation. *Forest Ecology and management*, 128 (2000), 83-91.
- Shoshany, M., Kutiel, P., & Lavee, H., (1994). Monitoring temporal vegetation cover changes in Mediterranean and arid ecosystems using a remote sensing technique: case study of the Judean Mountain and the Judean Desert. *Journal of Arid Environments*, 33: 9-21.
- Somporn S., (1995). *Land Use/ Land Cover Change Detection in the Chiang Mai Area Using Landsat TM*. Department of Geography and Environmental Science. Monash University, Victoria, Australia.
- Swain P.H., (1978). *Remote Sensing: The Quantitative approach*. West Larfayette, Inc., U.S.A.
- Townshend J.R.G., (1992). Land cover. *International Journal of Remote Sensing*, 13(6&7), 1319-1328
- XiaoMei Y, & RongQing L.Q.Y., (1999). *Change Detection Based on Remote Sensing Information Model and its Application on Coastal Line of Yellow River Delta*. Earth Observation Center, NASDA, China.
- Yale (1998). SWAP Irrigation Subprojects. (Online). Available at:<http://yale.edu/ceo/Projects/swap/Project/irrigation.html>. (Accessed: 2000, June 26).